




TruDefinition®  
**WeatherGuard® HP**  
Shingles



## Beauty designed to last.

TruDefinition® WeatherGuard® HP Impact Resistant Shingles are an excellent choice for homeowners concerned with the effect of severe weather on their roof. Unlike standard shingles, TruDefinition® WeatherGuard® HP Shingles are engineered with an integrated polymeric backing material for excellent performance and specially formulated to provide great contrast and dimension to any roof. When paired with WeatherGuard® HP Hip & Ridge Shingles<sup>1</sup>, they offer beauty and performance during and after the storm.

- Meets UL 2218, Class 4 Impact Resistance
- TruBond® sealant stands up to high winds
- Available in popular colors with bold, lively contrast and complementing shadow lines for greater dimension
- Limited Lifetime Warranty\*/\*\* (for as long as you own your home)
- 110/130-MPH Wind Resistance Limited Warranty\*/#
- StreakGuard™ Protection with an Algae Resistance Limited Warranty\*

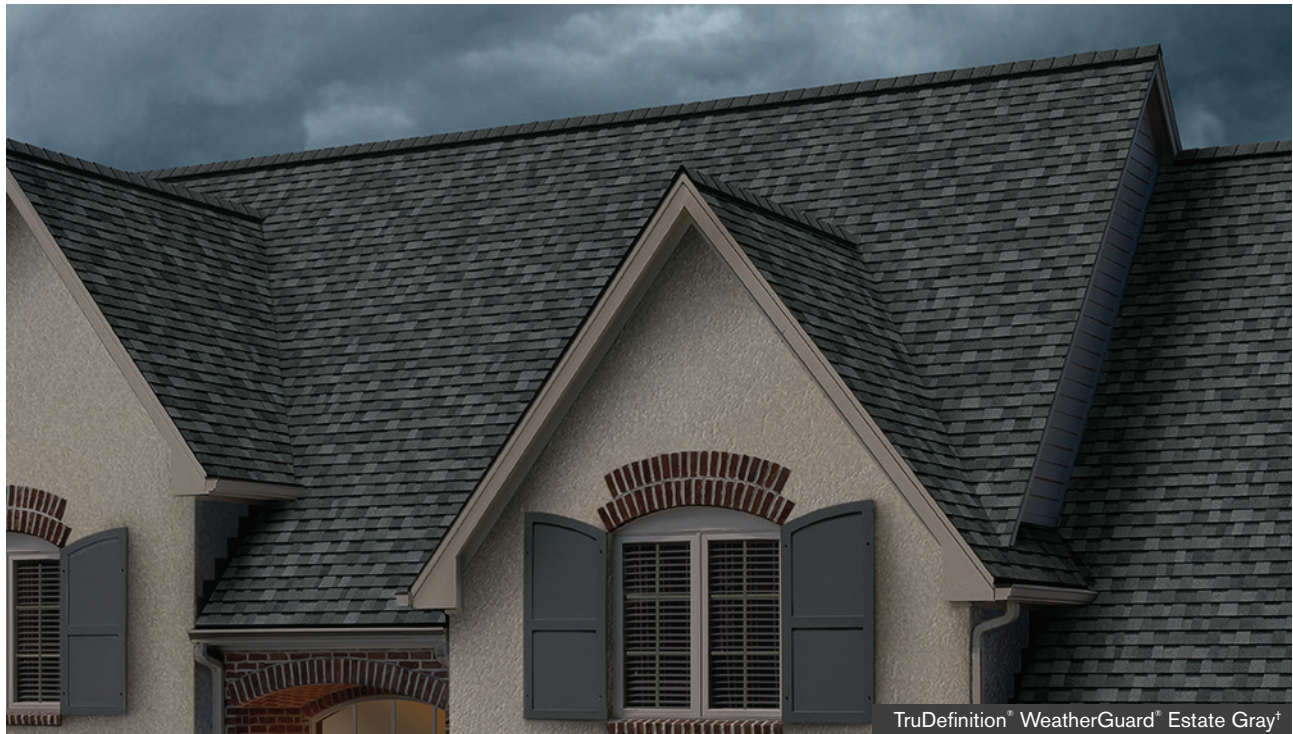

TruDefinition® WeatherGuard® Estate Gray†




## WeatherGuard® HP Hip & Ridge Shingles

- Offer beauty and a finishing touch
- Paired with TruDefinition® WeatherGuard® HP Impact-Resistant Shingles, an excellent choice for the effect of severe weather on the roof.

### • PRODUCT SPECIFICATIONS

Coverage (with 3-in. overlap)	<b>x sq. ft.</b>
Length	<b>x ft.</b>
Width	<b>x in.</b>

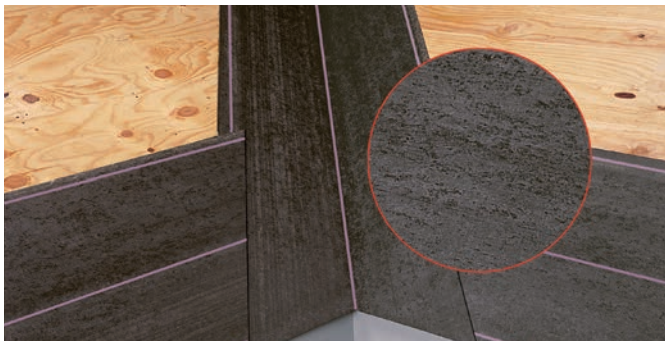

## WeatherLock® Mat Self-Sealing Ice & Water Barrier

- SureStep™ Technology provides excellent traction to help protect your crew against slipping
- Self-sealing to help prevent damage associated with shingle blow-off, wind-driven rain and ice damming
- Lighter and easy to load, carry and install

### • PRODUCT SPECIFICATIONS

Property	<b>2 sq. roll</b>
Length	<b>66.7 ft. (21.3m)</b>
Width	<b>3 ft. (.91 m)</b>
Area	<b>200 sq. ft. (18.6 m<sup>2</sup>)</b>
Thickness	<b>40 mils</b>



## ProArmor® Synthetic Roof Underlayment

- Utilizes slip resistant **Fusion Back Coating Technology™** to provide excellent grip to a roof deck which lends to a stable walking surface

### • PRODUCT SPECIFICATIONS

Coverage (with 3-in. overlap)	<b>929 sq. ft.</b>
Length	<b>286 ft.</b>
Width	<b>42 in.</b>



## VentSure® 4-foot Strip Heat & Moisture Ridge Vents

- Flat baffle, corrugated ridgeline, and interlocking feature for ultimate performance
- Easy-to-handle 4 foot sections
- Available with an optional Weather PROtector® Moisture Barrier

### • PRODUCT SPECIFICATIONS

Net Free Vent Area	<b>20 sq. in. per lineal ft.</b>
Width	<b>15"</b>
Length	<b>48"</b>
Height	<b>1"</b>
Shingle-Over Width	<b>12"</b>
Allowable Roof Pitch	<b>3/12 to 16/12</b>

<sup>1</sup> WeatherGuard® HP Hip & Ridge Shingles are required to complete UL 2218, Class 4 Impact-Resistant Roof System.

\* See actual warranty for complete details, limitations and requirements.

\*\* 40-Year Limited Warranty on commercial projects.

<sup>†</sup> Actual shingle colors and granule blends may vary from the photo. The pitch of your roof can also impact how a shingle looks on your home. We suggest that you view a roofing display or several shingles to get a better idea of the actual color. To accurately judge your shingle and color choice, we recommend that you view it on an actual roof with a pitch similar to your own roof prior to making your final selection.

<sup>‡</sup> 110 MPH is standard with 4-nail application. 130 MPH is applicable only with 6-nail application. To maintain the 130-MPH Wind Resistance Limited Warranty, each WeatherGuard® HP Hip & Ridge Shingle must be hand-sealed. Failure to hand-seal WeatherGuard® HP Hip & Ridge Shingles will reduce wind warranty to 110 MPH. Refer to installation instructions for complete details.

DW Distribution is an independent supplier and is not an affiliate of Owens Corning Roofing and Asphalt, LLC or its affiliated companies. © 2017 Owens Corning. All Rights Reserved.