




INTERIOR PRIMED STILE & RAIL

3-PANEL FLAT WITH MULTI-STEP STICKING

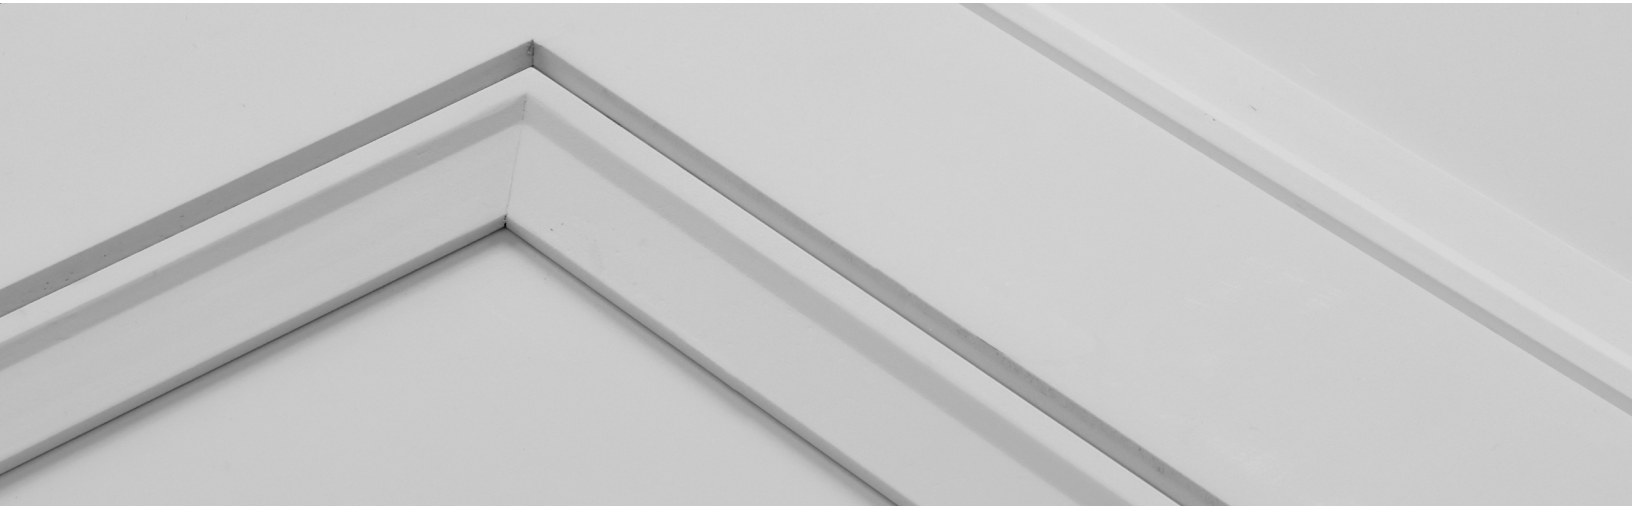


With a traditional PSR door, the sticking profile—such as ovolo or shaker—is machined directly into the stiles and rails, and the panels fit neatly into that groove. The panels flow straight out of the stiles and rails, creating a classic, timeless appearance.

We've elevated the design with our new 3-panel door. The stiles and rails feature beveled sticking that's precision-machined to accept a separate molding—often referred to as “step sticking.” This additional profile is then machined to receive the panels, creating a distinctive multi-step effect.

The result? Instead of the door having a traditional panel design, it's beautifully framed by the step sticking.

This layered detail adds depth, dimension, and clean lines—delivering a refined, more modern look that really stands out.

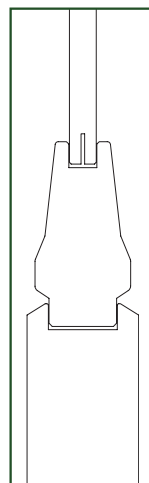

Panel Profile,
Multi-Step Sticking

PR3PFMS – 6/8 SIZE

3/8" MDF Flat Panel Multi-Step Sticking
1-3/4" Thickness is Fire-Rated

SIZE	1-3/8" THICKNESS	1-3/4" THICKNESS
1-0 x 6-8	72X	
1-2 x 6-8	72Y	
1-3 x 6-8	73B	
1-4 x 6-8	73C	
1-6 x 6-8	73E	
1-8 x 6-8	73F	
1-10 x 6-8	73G	
2-0 x 6-8	73H	
2-2 x 6-8	73K	
2-4 x 6-8	73L	
2-6 x 6-8	73M	Y86
2-8 x 6-8	73N	Y87
2-10 x 6-8	73P	Y88
3-0 x 6-8	73R	Y89
1-6 x 8-0	73S	
2-0 x 8-0	73T	
2-4 x 8-0	73V	
2-6 x 8-0	73W	Y91
2-8 x 8-0	73X	Y92
2-10 x 8-0	73Y	Y93
3-0 x 8-0	73Z	Y94

Contact your Specialty Building Products Representative for more information.

www.dwdistribution.com

800-394-1993



SPECIALTY BUILDING PRODUCTS®